

Blackjack Bitumen Paint

General purpose industrial grade bitumen paint
Suitable for potable water complies with AS4020

Blackjack Bitumen Paint is an industrial bitumen (hard bitumen) based paint dissolved in hydrocarbon solvent. Bitumen paint is used to protect metal surfaces from oxidization from water, sunlight, and weather exposure.

Uses

- All metal surfaces for corrosion protection.
- All bituminous or masonry surfaces for moisture protection.

Surface Preparation

- All surfaces to be painted must be clean and dry and free from oils, waxes and grease.
- New hot dip galvanizing must be weathered 6 months before application of any paint.

Clean Up

- Blackjack Bitumen Paint** is soluble in mineral turps. Equipment may be flushed with turps and equipment wiped clean with a turps soaked rag.
- Avoid contact with skin, however most hand cleaners suitable for grease and oil will remove product from painted items.
- Always do a small test area first to ensure that the substrate is not affected by the stripper.

Application Data

- Can be applied by brush, spray, roller.
- Should apply in 2 coats to get an even look.
- Where sunlight (uv) exposure is encountered we recommend over coating with our Blackjack Silver.

Specification and Technical Data

Colour	■ Black
Material	Bitumen, Solvents
Odour	Bitumen, Solvents
Coverage	Painting – 3m ² /litre in a two-coat application Priming – 10m ² /litre
Drying Time	2 - 4 (hours depending on ambient temperature) 12 - 24 (hours for curing)
*Packaging	20 Litre & 205 Litre Drums

Blackjack Brushable Paint

High Build bitumen based brushable anticorrosive and waterproof paint

Blackjack Brushable paint is a high build bitumen based brushable anticorrosive and waterproof paint. **Blackjack Brushable** is suitable for potable (drinking) water tanks.

Uses

- Repair and corrosion protection of weathered galvanised iron. Waterproofing of masonry structures etc. Can also be used as a sound deadening or anti drumming compound in car underbodies.

Application Data

- Clean surface of dirt, grease, oils, dust and loose material. Wire brush all steel surfaces. Stir well before use. Apply by brush, roller, or squeegee. Overcoat with Blackjack Silver to protect against U.V. exposure. Ensure a minimum of two coats.

Specification and Technical Data

Colour	■ Black
Drying Time	12 – 24 hours
Coverage	1 – 3m ² /litre
Specific Gravity	= 1.0 approximately (1 Litre / Kg)
Thinners	Mineral Turps
Flash Point	40°C
Volatiles	30 - 35%
Bitumen Content	40 - 45%
Filler and Fibre Content	20 - 25%
*Packaging	4 Litre, 20 Litre & 205 Litre

Blackjack Trowelable Putty

High viscosity knife or trowel grade bituminous putty

A high viscosity knife or trowel grade bituminous putty which is slump resistant. Blackjack putty is acid and alkali resistant and is suitable for potable (drinking) water tanks. Dries to a thick membrane and waterproof surface.

Uses

- Sealing of cracks and holes in roofing and tanking work, both galvanized iron and concrete. For repairing cracks and holes in roofing materials, such as galvanised iron sheet, gutters, downpipes, and flashings. These repairs can be made in conjunction with glass mesh or flyscreen wire for bridging holes or for flashing turn-ups on built-up roofs. Also used for sealing voids between metal and concrete. Used also for protecting insulation and steel structural membranes from weathering, corrosion and chemical inhibition.

Surface Preparation

- Surfaces to be sealed should clean, free of rust, dirt, grease, scale and dust.

Application Data

- Apply with a trowel, spatula, knife or caulking gun. Can be applied on damp surfaces. Large holes can be bridged by sandwiching a layer of open weave glass fiber scrim between layers of putty.
- Can be coated to provide UV protection with Blackjack Silver after allowing at least 7 days to dry.

Specification and Technical Data

Colour	■ Black
Drying Time	7 Days Minimum
Coverage:	1 Kg fills a hole 100mm x 100mm x 80mm or a joint 1 metre x 30mm x 25mm
Clean Up	Mineral Turps or White Spirits
*Packaging	1 Kg and 4 Kg Lithographed Cans & 20 Kilo Containers

Blackjack Silver

Low viscosity bitumen based aluminum paint (**Sprayable**)

A low viscosity bitumen based aluminum paint that is UV resistant. Provides a protective barrier for all bitumen-based coatings that are exposed to sunlight. Also provides a bleed through barrier when painting over bitumen based coatings.

Uses

- All steelwork, galvanized roofs, potable (drinking) water tanks, all bituminous membranes and coatings.

Application Data

- Clean surface free from rust, grease, oil, wax or dirt. Leave new hot dip galvanized iron a minimum of 6 months to weather before coating.
- Stir can well before use and apply by brush, roller, or spray. Use spray for best results.

Specification and Technical Data

Coverage	7-10 m ² /litre
Flash Point	40°C
Drying Time	6 – 24 hours Depending on ambient temperatures
Specific Gravity	0.98
Thinners	Mineral Turps or White Spirits
*Packaging	1 Litre and 4 Litre Lithographed Cans 15 Litre Pails

Blackjack Rubber Membrane

Cold applied liquid membrane

Blackjack Rubber Membrane is a cold applied liquid that dries to resemble a highly elastic tyre inner-tube, especially when multi-coats are applied to achieve a robust thickness.


Uses

- To line masonry walls, planter boxes, roofs etc
- Blackjack Rubber Membrane** can be used to patch holes in corrugated sheeting by applying under and over flywire screen.
- Blackjack Rubber Membrane** may also be used as a construction membrane. Reference must be made to the architect or engineer and this information is provided as a guide only. See below for a suggested system for shower base application. Adhesion to the substrate and subsequent materials must always be tested before use.
- On roof applications Blackjack Silver can be applied to provide UV sunscreen protection.

Application Data

- Blackjack Rubber Membrane** can be applied by brush, roller or squeegee. Clean surface of dirt, grease, oils, dust and other loose material. The surface should be **dry**. Wire brush all steel surfaces. Stir product well before use. Overcoat with Blackjack Silver for UV resistance.

Construction Membrane Suggestion

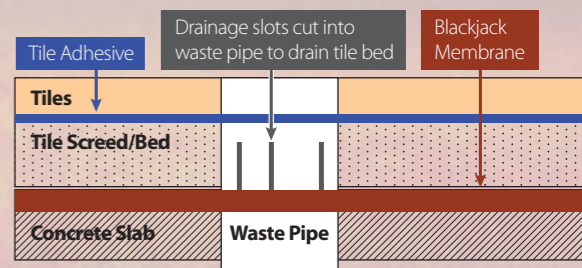

Specification and Technical Data

Coverage	1.5 Litres Wet Covers 1m ² at 1mm Dry Film Thickness 20 Litres Wet Covers 13m ² at 1mm Dry Film Thickness
Drying Time	Allow 24 hours between coats
% Solids	57 % w/w @ 25°C 53.5% v/v @ 25°C
Flash Point	15°C
Service Temp	Ambient
Thinners	Mineral Turps
*Packaging	1 Litre & 4 Litre Lithographed Cans 20 Litre & 205 Litre Drums

Safety:

- Refer to Safety Data sheets before use.
- Eliminate all potential ignition sources during application.
- Avoid breathing vapours.

- Avoid contact with skin.
- Always wear appropriate PPE.
- Do not** allow product or washings to enter stormwater or sewer systems.



*Packaging - Steel containers are recyclable provided they are empty and any residual product is dry.





- Blackjack Bitumen Paint** is a multi purpose solvent based bitumen paint for waterproofing and corrosion resistance.
- Blackjack Brushing Grade** is a fibre reinforced waterproofing and patching compound for high build application by brush.
- Blackjack Trowelling Grade** is a fibre reinforced waterproofing and patching compound for very high build application by trowel or knife.
- Blackjack Silver** is a bitumen paint with aluminium flakes for appearance and UV protection.
- Blackjack Liquid Membrane** is a highly elastic joint sealer and membrane coating.

www.bituminous.com.au

Sydney Head Office

📍 66 Violet Street, Revesby NSW 2212
☎ +61 2 9772 4433
📠 +61 2 9792 1016

Brisbane Office

📍 15 Randle Road, Pinkenba QLD 4008
☎ +61 7 3260 1088
📠 +61 7 3260 2843

Townsville Office

📍 105 Enterprise Street, Bohle QLD 4818
☎ +61 7 4774 8311
📠 +61 7 4774 8318

Melbourne Office

📍 40 Cahill Street, Dandenong VIC 3175
☎ +61 3 9706 6444
📠 +61 3 9706 6055

Perth Office

📍 32 Ewing Street, Bently WA 6102
☎ +61 8 9351 1356
📠 +61 8 9351 1330

The original BLACKJACK

www.bituminous.com.au

**Bitumen Waterproofing
& Anticorrosive Coating**

